

Overview of the HP Integrity rx1600-2, rx2600-2, and rx4640-8 servers

A technical white paper from HP



Executive summary.....	3
The Intel® Itanium® 2 processor.....	3
Introducing the HP mx2 dual-processor module	3
Itanium 2–based HP Integrity rx1600-2, rx2600-2, and rx4640-8 servers	4
HP Integrity rx1600-2 server at a glance.....	4
HP Integrity rx1600-2 server details	5
HP Integrity rx1600-2 server product specifications	5
Physical and environmental specifications	6
Mechanical design and packaging of the HP Integrity rx1600-2 server	7
Racking density.....	7
HP Integrity rx2600-2 server at a glance.....	8
HP Integrity rx2600-2 server details	8
HP Integrity rx2600-2 server product specifications	8
Physical and environmental specifications	10
Mechanical design and packaging of the HP Integrity rx2600-2 server	11
Racking density.....	11
Standalone pedestal configuration	12
Workstation or server? Here’s how to choose	12
HP Integrity rx4640-8 server at a glance.....	14
HP Integrity rx4640-8 server details	15
HP Integrity rx4640-8 server product specifications	15
Physical and environmental specifications	16
Mechanical design and packaging of the HP Integrity rx4640-8 server	17
Racking density.....	18
High-availability slider rails	18
Cabinet spacing requirements	18
Standalone (rackless) configuration	18

Itanium 2-based and HP mx2-based Integrity servers	18
Overview of the HP Scalable Processor Chipset zx1	18
Architectural overview of the HP Integrity rx1600-2 server	21
Architectural overview of the HP Integrity rx2600-2 server	22
Architectural overview of the HP Integrity rx4640-8 server	23
Extensible firmware interface	24
Baseboard management controller	24
HP management processor	25
Built for high availability	26
High-availability chassis infrastructure (power and cooling)	26
Hot-plug disk drives	27
Multiple I/O channels	27
ECC and chip spare memory	27
CPU error correction and dynamic processor resiliency	27
Comprehensive error logs	28
Fault management throughout the lifecycle	28
Capabilities of fault monitors	28
Notification and integrated enterprise management	29
Added options with HP support	29
Proactive, not reactive	29
An easy transition for RISC and IA-32 users	29
Running 32-bit Windows applications	30
Running 32-bit Linux applications	30
Running RISC applications	30
Porting and migration services: transition help from HP	30
HP Services for the HP Integrity servers	31
Evolve your infrastructure confidently with a partner that stands accountable	31
HP StorageWorks and HP servers	31
The cornerstone of an Adaptive Enterprise	31
Delivering more together	31
More RoIT with HP StorageWorks and HP servers	32
Conclusion	32
For more information	33

Executive summary

For many types of computing, systems based on the Intel® Itanium® 2 processor, co-developed by HP and Intel, and the HP mx2 dual-processor module consisting of two Intel Itanium processors offer markedly superior performance over other systems that utilize RISC, Power, SPARC or x86/IA-32 processors—while still maintaining a very competitive price. The HP Integrity rx1600-2, rx2600-2, and rx4640-8 servers deliver price/performance that has changed the 64-bit server market.

The Integrity rx1600-2, rx2600-2, and rx4640-8 servers utilize the HP-designed Scalable Processor Chipset zx1, which integrates the Intel Itanium 2 processor with industry-leading high-bandwidth and low-latency connections to memory and I/O. HP continues to prove the Intel Itanium architecture concept of highly parallel, 64-bit performance with a lineup of servers that are full featured, have a unique high-bandwidth system architecture, and use industry-leading commodity parts to promote compatibility and economical pricing.

This white paper provides details about these HP Integrity servers, shows their features and benefits, discusses their electrical architectures, and provides a breakdown of their unique high-availability features. What's more, this paper illustrates how HP simplifies the transition from RISC and IA-32 architectures while preserving an IT user's investment in existing software.

The Intel® Itanium® 2 processor

The Intel Itanium 2 processor is a milestone in the continuing evolution of microprocessors because it is the first enterprise-class 64-bit processor that has the power to become pervasive. Let's take a closer look at what this means.

Today, 32-bit servers or proprietary 64-bit RISC servers are the norm. They have respectable price/performance ratios but are either fundamentally limited in performance scalability or are exceedingly expensive.

Servers based on the Intel-architecture 32-bit (IA-32) processors, for example, are unable to address large amounts of memory efficiently. Meanwhile, 64-bit RISC architectures have the necessary performance and addressing, but they are more expensive and generally lock the customer into a proprietary operating environment and a single computer vendor. End users and IT professionals alike are clamoring for high performance and large addressing at an economical price. And they also are asking for pervasiveness so they do not have to deal with multiple architectures and complexity.

HP and Intel co-developed the Intel Itanium 2 microarchitecture. The result is a high-performance, parallel 64-bit architecture that has the performance headroom to grow in the future and can be priced at a level to ensure its widespread adoption. The Intel Itanium 2 microarchitecture fulfills both of these promises and is likely to become pervasive very quickly. The Intel Itanium 2 processor is the fundamental building block of the entry-level HP Integrity rx1600-2, rx2600-2, and rx4640-8 servers.

Introducing the HP mx2 dual-processor module

The HP mx2 dual-processor module is a superb example of HP adding customer value and innovation on top of industry-standard technology. The HP mx2 dual-processor module is supported in the Integrity rx4640-8 server (as well as in the Integrity Superdome and Integrity rx7620-16 and rx8620-32 servers). The mx2 dual-processor module consists of two 1.1 GHz Intel Itanium 2 processors, each with 4 MB L3 cache as well as a large 32 MB shared L4 cache. The design of the mx2 dual-processor module (it uses the same pin configuration as the single-processor board) allows it to fit into the same processor slot in a system board that a standard single-processor Intel Itanium 2 CPU fits into.

The single Intel Itanium 2 processors currently sold in the HP Integrity rx4640-8 server (1.3 and 1.5 GHz) are the latest generation of technology from Intel and will continue to be offered in the Integrity rx4640-8 server. The HP mx2 dual-processor module will be available as an addition to these current offerings. By offering both single Intel Itanium 2 processors and the mx2 dual-processor modules, HP is able to provide customers with significant choices in the technology that is best suited for their environment. The Integrity rx4640-8 server does not support mx2 dual-processor modules mixed with single-processor Intel Itanium 2 CPUs in the same server. The mx2 dual-processor module is not supported on Linux® operating systems.

The HP mx2 dual-processor module doubles the CPU capacity of the Integrity rx4640-8 server. This makes it a superb choice for large workloads and consolidation. On UNIX® commercial workloads, per-CPU performance of each CPU with mx2 dual-processor modules is similar to that of single-processor Intel Itanium 2 CPUs, resulting in outstanding overall performance as well as price/performance. From a power perspective, one mx2 dual-processor module uses about the same amount of power as a standard single Intel Itanium 2 processor, helping to reduce costs associated with power.

Customers who own an rx4640 with single-processor Intel Itanium 2 (Madison) processors installed will be able to upgrade to the HP mx2 dual-processor modules simply by swapping processor modules and installing new firmware. The transition from the rp4440-8 to an Integrity rx4640-8 server with the mx2 dual-processor modules is done the same way. The upgrade path from an rp5400 series server or from the HP 5x5670 to the Integrity rx4640-6 server with mx2 dual-processor modules is a box swap. Even though the transition from PA-8800 to the mx2 dual-processor module will require a change in the version of the operating system from HP-UX 11i v1 to HP-UX 11i v2, HP's transition assistance program provides peace of mind in upgrading to industry-leading technology. In addition, the HP-UX 11i operating system has built-in source, data, and binary compatibilities. HP-UX 11i data and source compatibility provides seamless integration into the data center. HP-UX 11i Linux binary and source compatibility enables running of Linux applications. Legacy applications have expanded longevity from HP 9000 servers to HP Integrity servers via the HP Aries translator.

Itanium 2–based HP Integrity rx1600-2, rx2600-2, and rx4640-8 servers

Itanium 2–based servers from HP are targeted at performance-hungry markets such as technical and scientific computing, Secure Sockets Layer (SSL) Web serving, application serving, and database applications. What's more, these systems are highly affordable, making them extremely attractive to software developers. Read on to learn about the system features that fulfill these promises.


HP Integrity rx1600-2 server at a glance

The HP Integrity rx1600-2 server uses the Low Voltage Intel Itanium 2 processor in a slim, 1U (3.5-inch high) system package. It provides industry-leading performance in a dense form factor. The Low Voltage (LV) Intel Itanium 2 processor delivers industry-leading \$/FLOPS for compute-intensive workloads, at lower power levels, where space is at a premium. The HP Integrity rx1600-2 server supports up to two 1.0 GHz LV Intel Itanium 2 processors with 1.5 MB of on-chip L3 cache and as much as 16 GB of RAM. This means that it has extraordinary compute density. Fitting 41 servers into a 2-meter rack delivers an astounding 320 gigaFLOPS of potential power.

The Integrity rx1600-2 server also leverages the same management features as the Integrity rx2600-2 server. It is ideal for compute-intensive server farms in the high-performance technical and scientific computing markets, and it is a perfect fit for the network edge, security, and software engineering fields. Features such as memory chip spare, an optional management processor, and high-availability clustering support make the Integrity rx1600-2 server a leader among high compute density servers.

The Integrity rx1600-2 server is also flexible, with a choice of 64-bit operating systems—HP-UX 11i v2, Linux, or OpenVMS Evaluation Release (until 4Q04, when a production-quality release is expected)—to suit any need. And there's a full range of HP storage peripherals and I/O adapters to complete the package.

Figure 1. The HP Integrity rx1600-2 server is a rackmount unit

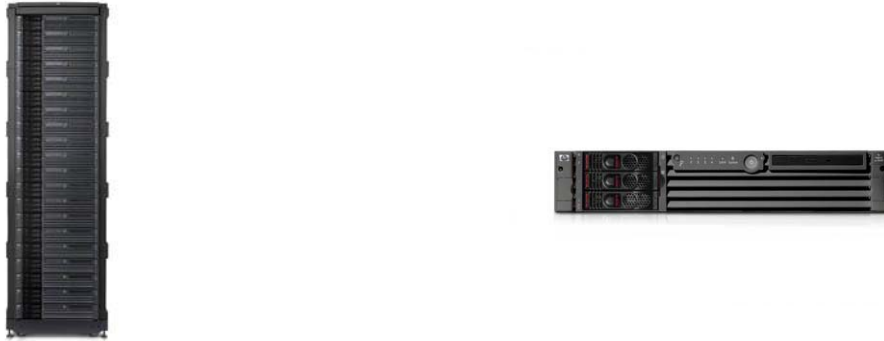

HP Integrity rx1600-2 server details

HP Integrity rx1600-2 server product specifications

- Central processor
 - 1 or 2 Low Voltage Intel Itanium 2 processors at 1.0 GHz
- Cache (all on-chip)
 - 16 KB instruction and 16 KB data level 1 cache
 - 256 KB level 2 cache
 - 1.5 MB level 3 cache
- Main memory
 - 512 MB minimum to 16 GB maximum PC2100 parity-protected ECC chip spare DDR CL2 memory in 8 DIMM slots (DIMMs must be installed in groups of two)
 - 8.5 GB/s memory bandwidth
- Chipset
 - HP zx1 Chipset
 - 80-nanosecond memory latency
 - 6.4 GB/s system bus bandwidth
 - 3.5 GB/s aggregate I/O bandwidth
- Expansion slots
 - 1 PCI-X, 1 GB/s sustained, 64-bit 133 MHz, full-length
 - 1 PCI-X, 1 GB/s sustained, 64-bit 133 MHz, half-length
- Hot-plug disk drives (2 bays for 1-inch-high 3.5-inch disks)
 - 292 GB maximum internal storage
 - Integrated dual-channel Ultra320 SCSI controller
 - Disk sizes available: 36 GB 10,000 rpm, 73 GB 15,000 rpm, and 146 GB 10,000 rpm

- Removable media
 - One slimline media bay for optional IDE optical drives
 - Choice of 16X DVD-ROM or 16X/10X/40X CD-RW (also reads DVD)
- Core I/O interconnect ports
 - Gigabit-TX LAN with RJ-45 connector (10/100/1000BT auto-sensing)
 - 10/100BT LAN with RJ-45 connector and Wake-on-LAN capability
 - Ultra320 SCSI
 - General-purpose RS-232 serial ports
 - VGA
 - 2 USB Series A 2.0 (480 Mb/s) ports
 - Management processor interconnect:
 - 10/100BT management LAN with Web console access
 - RS-232 local console
 - RS-232 remote/modem console
 - RS-232 general purpose
- Power and cooling
 - One 400 W power supply standard
 - 4 cooling fans
- Power requirements
 - Input current: 100–127 V ~5.5 A/200–240 V ~2.8 A (auto-ranging)
 - Line frequency: 50 Hz to 60 Hz
 - Maximum power input: 700 W


Physical and environmental specifications

- Environmental specifications
 - Altitude:
 - Operating: 3048 m (10,000 ft.) maximum
 - Storage: 4572 m (15,000 ft.) maximum
 - Temperature:
 - Operating: +05° C to +35° C (+41° F to +95° F)
 - Non-operating: –40° C to +70° C (–40° F to +158° F)
 - Humidity:
 - Operating: 15% to 80% (relative)
- Physical dimensions in rack orientation
 - Height: 4.3 cm (1.7 in.)
 - Width: 48.2 cm (19 in.)
 - Depth: 68.0 cm (26.8 in.)
- Net weight
 - Maximum standalone configuration: 14.1 kg (31 lbs.)

Mechanical design and packaging of the HP Integrity rx1600-2 server

The exploded view reveals the location of major components as well as the mechanical and architectural features of the Integrity rx1600-2 server. It is partitioned into three electrical partitions—the system board, including CPUs, memory, and core I/O; the I/O backplane, including two PCI-X I/O slots; and the optional management processor board.

Figure 2. Major components of the HP Integrity rx1600-2 server

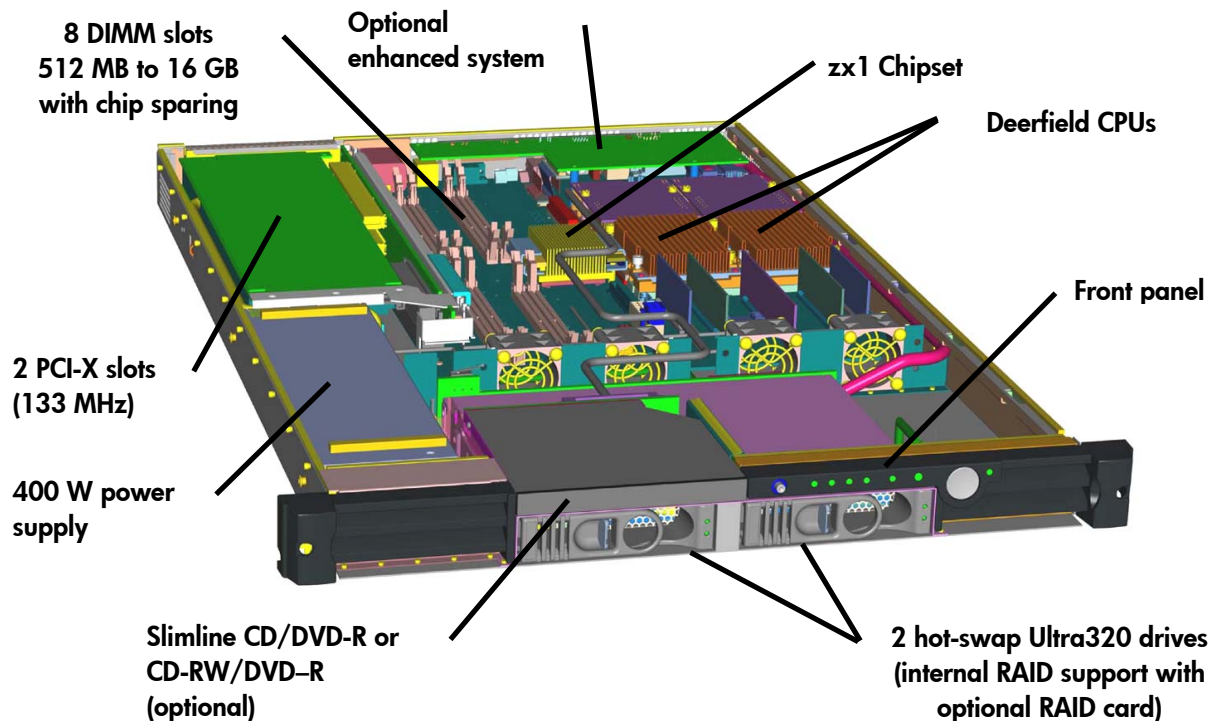

Two hot-swap disk drive bays are located in the lower right corner of the server (when viewed from the front). Just above the power supplies is a slimline optical media drive bay, supporting either a DVD or a DVD/CD-RW combo drive. Directly behind the power supplies and peripheral bays are four cooling fans.

The left side of the system houses the I/O backplane and I/O card bay. There are two PCI-X slots in the I/O card bay: one full-length slot and one half-length slot.

The right rear of the server contains the main system board. The system board contains two Intel Low Voltage Itanium 2 processor sockets, 8 memory DIMM slots, and the core I/O controllers. The management processor sits on an independent circuit board that attaches to the rear of the main system board.

Racking density

The Integrity rx1600-2 server is designed to provide unprecedented performance density. At only one EIA unit (EIA unit = 1.75 inches) per server, up to 41 systems can be installed into a single 2-meter HP cabinet.

The Integrity rx1600-2 server is supported in HP Rack System/E and 10000 series racks. The server is also supported in a variety of third-party, non-HP racks and cabinets.

Note: Dimensions for rack configuration are as follows: height = 1.7 inches (4.3 cm), depth = 26.8 inches (68.0 cm), width = 19 inches (48.2 cm).

HP Integrity rx2600-2 server at a glance

The HP Integrity rx2600-2 server is the industry's best-performing 2-way Itanium 2-based server. It has a sleek 2U footprint and can be equipped with up to two 1.5 GHz Intel Itanium 2 processors loaded with 6 MB of on-chip L3 cache and as much as 24 GB of RAM. This means that it has extraordinary compute density. Fitting 20 servers into a 2-meter rack delivers an astounding 240 gigafLOPS of potential power.

The Integrity rx2600-2 server also has extensive availability and management features, which make it ideal for deployments in mission-critical data centers or compute-intensive server farms. Features such as hot-swap redundant components, memory chip spare, an integrated management processor, and high-availability clustering support make the Integrity rx2600-2 server the clear leader among 2-way Itanium 2-based servers.

The Integrity rx2600-2 server offers incredible investment protection with in-chassis upgrades to future Intel Itanium 2 processors. The Integrity rx2600-2 server is also flexible, with a choice of 64-bit operating systems—HP-UX 11i v2, Linux, Microsoft® Windows®, or OpenVMS Evaluation Release (until 4Q04, when a production-quality release is expected)—to suit any need. It can be installed in a rack or in a standalone vertical tower configuration. And there's a full range of HP storage peripherals and I/O adapters to complete the package.

Figure 3. The HP Integrity rx2600-2 server can be installed in a rack or as a standalone unit



HP Integrity rx2600-2 server details

HP Integrity rx2600-2 server product specifications

- Central processor
 - 1 or 2 Intel Itanium 2 processors at 1.0 GHz, 1.3 GHz, 1.4 GHz, or 1.5 GHz
- Cache (all on-chip)
 - 16 KB instruction and 16 KB data level 1 cache
 - 256 KB level 2 cache
 - 1.5 MB level 3 cache (1.0 GHz and 1.4 GHz)

- 3 MB level 3 cache (1.3 GHz)
- 6 MB level 3 cache (1.5 GHz)
- Main memory
 - 1 GB minimum to 24 GB maximum PC2100 parity-protected ECC chip spare DDR CL2 memory in 12 DIMM slots (DIMMs must be installed in groups of four)
 - 8.5 GB/s memory bandwidth
- Chipset
 - HP zx1 Chipset
 - 80-nanosecond memory latency
 - 6.4 GB/s system bus bandwidth
 - 4.0 GB/s aggregate I/O bandwidth
- Expansion slots
 - 1 PCI-X, 1 GB/s sustained, 64-bit 133 MHz
 - 3 PCI-X, 0.5 GB/s sustained, 64-bit 133 MHz
 - Each slot is full-length and has an independent bus
- Hot-plug disk drives (3 bays for 1-inch-high 3.5-inch disks)
 - 438 GB maximum internal storage
 - Integrated dual-channel Ultra320 SCSI controller
 - Disk sizes available: 36 GB 15,000 rpm, 73 GB 15,000 rpm, and 146 GB 10,000 rpm
- Removable media
 - One slimline media bay for optional IDE optical drives
 - Choice of 16X DVD-ROM or 16X/10X/40X CD-RW (also reads DVD)
- Core I/O interconnect ports
 - Gigabit-TX LAN with RJ-45 connector (10/100/1000BT auto-sensing)
 - 10/100BT LAN with RJ-45 connector and Wake-on-LAN capability
 - Ultra320 SCSI
 - 2 general-purpose RS-232 serial ports
 - VGA
 - 4 USB Series A 2.0 (480 Mb/s) ports
 - Management processor interconnect:
 - 10/100BT management LAN with Web console access
 - RS-232 local console
 - RS-232 remote/modem console
 - RS-232 general purpose
- Power and cooling
 - One 650 W hot-swap power supply standard
 - Optional second 650 W hot-swap power supply for N+1 redundancy
 - 4 cooling fans with N+1 redundancy
- Power requirements
 - Input current: 100–120 V 7.2 A/200–240 V 3.2 A (auto-ranging)
 - Line frequency: 50 Hz to 60 Hz
 - Maximum power input: 714 W


Physical and environmental specifications

- Environmental specifications
 - Altitude:
 - Operating: 3048 m (10,000 ft.) maximum
 - Storage: 4572 m (15,000 ft.) maximum
 - Temperature:
 - Operating: +05° C to +35° C (+41° F to +95° F)
 - Non-operating: -40° C to +70° C (-40° F to +158° F)
 - Humidity:
 - Operating: 15% to 80% (relative)
- Physical dimensions in rack orientation
 - Height: 8.6 cm (3.4 in.)
 - Width: 48.2 cm (19 in.)
 - Depth: 68.0 cm (26.8 in.)
- Physical dimensions in standalone, vertical orientation
 - Height: 49.5 cm (19.5 in.)
 - Width: 29.7 cm (11.7 in.)
 - Depth: 67.3 cm (26.5 in.)
- Net weight
 - Minimum standalone configuration: 22.4 kg (49.4 lb.)
 - Maximum standalone configuration: 25.5 kg (56.2 lb.)
 - Minimum rack configuration: 17.5 kg (38.6 lb.)
 - Maximum rack configuration: 22.2 kg (49.0 lb.)

Mechanical design and packaging of the HP Integrity rx2600-2 server

The exploded view reveals the location of major components as well as the mechanical and architectural features of the Integrity rx2600-2 server. It is partitioned into three electrical partitions—the system board, including CPUs, memory, and core I/O; the I/O backplane, including four PCI-X I/O slots; and the management processor board.

Figure 4. Major components of the HP Integrity rx2600-2 server

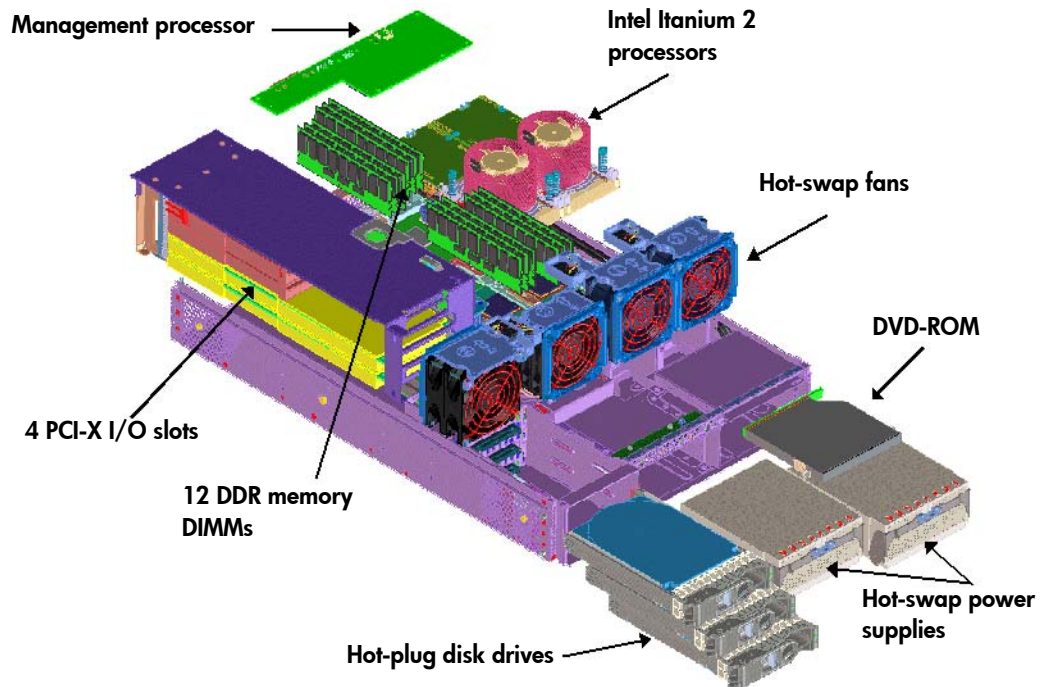

Two hot-swap power supply bays are located in the lower right corner of the server (when viewed from the front). Just above the power supplies is a slimline optical media drive bay, supporting either a DVD or a DVD/CD-RW combo drive. To the left of the unit's front are three bays for hot-plug hard disk drives. Directly behind the power supplies and peripheral bays are four hot-swap cooling fans.

The left side of the system houses the I/O backplane and I/O card bay. There are four PCI-X slots in the I/O card bay.

The right rear of the server contains the main system board. The system board contains two Intel Itanium 2 processor sockets, 12 memory DIMM slots, and the core I/O controllers. The management processor sits on an independent circuit board that attaches to the rear of the main system board.

Racking density

The Integrity rx2600-2 server is designed to provide unprecedented performance density. At only two EIA units (one EIA unit = 1.75 inches) per server, up to 20 systems can be installed into a single 2-meter HP cabinet.

The Integrity rx2600-2 server is supported in HP Rack System/E and 10000 series racks. The server is also supported in a variety of third-party, non-HP racks and cabinets.

Note: Dimensions for rack configuration are as follows: height = 3.4 inches (8.6 cm), depth = 26.8 inches (68.0 cm), width = 19 inches (48.2 cm).

Standalone pedestal configuration

The Integrity rx2600-2 server is also available in a standalone configuration when a cabinet is not desired. The standalone system is ideal for an office environment, under a desk, or on a shelf. The standalone configuration uses a stylish tower mounting shell, with the system simply placed inside this shell.

Note: Dimensions for standalone configuration: height = 19.5 inches (49.5 cm), depth = 26.5 inches (67.3 cm), width = 11.7 inches (29.7 cm).

Workstation or server? Here's how to choose

HP also sells the Itanium 2-based HP Workstation zx6000. The HP Integrity rx2600-2 server and HP Workstation zx6000 are both 1- or 2-way Itanium 2-based systems. Both utilize HP's high-performance zx1 Chipset. Beyond that, however, the Integrity server is a very different class of system.

The Integrity rx2600-2 server is optimized for high-performance server I/O with four 133 MHz PCI-X slots, including one full-bandwidth 1 GB/s slot. The HP Workstation zx6000 is tailored for high-performance AGP graphics support. Moreover, the Integrity rx2600-2 server includes many high-availability features that are critical in commercial and many technical server environments; these high-availability features, such as chip spare memory and high-availability clustering support, are unique to the Integrity rx2600-2 server. This server is the best choice for compute node clusters and mission-critical commercial applications because of its advanced connectivity, remote manageability, and superior availability.

The two systems also support different versions of HP strategic operating systems. The Integrity rx2600-2 server supports the commercial and technical operating environments of HP-UX 11i v2, Microsoft's Windows Server 2003 operating system, and OpenVMS. The HP Workstation zx6000 supports the client and technical versions of HP-UX 11i v2 as well as the Microsoft Windows XP client operating system. For Linux, the workstation and server support different distributions, focused on either client or server computing. The following table summarizes the differences between the Integrity rx2600-2 server and the HP Workstation zx6000.

Table 1. Comparing the HP Workstation zx6000 with the Integrity rx2600-2 server

	HP Workstation zx6000	HP Integrity rx2600-2 server
Category	Optimized for high-performance AGP graphics support for the 1- or 2-way technical computing workstation markets	Optimized for high-performance PCI-X I/O for the 2-way server and performance cluster markets
Target usage model	Computer-aided engineering, scientific research, life sciences, digital content creation rendering, mechanical CAD, workstation software development, graphics clusters	Computer-aided engineering clusters, scientific research clusters, secure Web serving, application serving, server software development
Intel Itanium 2 processors	One or two 1.3 GHz with 3 MB L3 on-chip cache, or one or two 1.5 GHz with 6 MB L3 on-chip cache	One or two 1.0 GHz or 1.4 GHz with 1.5 MB L3 on-chip cache, or one or two 1.3 GHz with 3 MB L3 on-chip cache, or one or two 1.5 GHz with 6 MB L3 on-chip cache
Memory capacity	24 GB Installed in pairs of DIMMs	24 GB of chip spare memory Installed in quads of DIMMs
System bus bandwidth	6.4 GB/s	6.4 GB/s
System memory bandwidth	8.5 GB/s	8.5 GB/s
Aggregate I/O bandwidth (at HP zx1 Chipset channels)	4.0 GB/s	4.0 GB/s
I/O slots	One AGP-4X (1 GB/s) 66 MHz Three PCI-X (0.5 GB/s) 133 MHz	One PCI-X (1 GB/s) 133 MHz Three PCI-X (0.5 GB/s) 133 MHz
Operating systems supported	HP-UX 11i v2 client and technical versions Microsoft Windows (client version) 64-bit Linux (workstation distributions)	HP-UX 11i v2 (commercial and technical versions) Microsoft Windows Server 2003, Enterprise Edition 64-bit Linux (client and workstation distributions) OpenVMS v8.1 Evaluation Release
Graphics support	3D and 2D AGP	2D via integrated VGA port
Audio support	Yes—optional PCI card	Not available
Internal storage	Three 3.5-inch bays for hot-plug Ultra320 SCSI devices	Three 3.5-inch bays for hot-plug Ultra320 SCSI devices
Management processor card	Optional	Standard
Hot-plug disks	Yes	Yes
Memory chip spare	No	Yes
Redundant hot-swap power supplies	Optional	Optional
Redundant hot-swap fans	Yes	Yes
HP Serviceguard clustering support	No	Yes
Tower configuration	Yes (with quieter fans for desk-side use)	Yes (with redundant fans)
Rack-optimized configuration	Yes—2U Maximum 20 systems in a 2-meter rack	Yes—2U Maximum 20 systems in a 2-meter rack

HP Integrity rx4640-8 server at a glance

The HP Integrity rx4640-8 server now supports the HP mx2 dual-processor module. Each mx2 dual-processor module consists of two Intel Itanium 2 processors. The Integrity rx4640-8 server continues to support the single Itanium 2 processors operating at 1.3 GHz and 1.5 GHz. An Integrity rx4640-8 server can be equipped with either up to four Intel Itanium 2 processors or up to four mx2 dual-processor modules (single Itanium 2 processors and mx2 dual-processor modules cannot be mixed in the same system) and as much as 64 GB of RAM. The Integrity rx4640-8 server also supports six available PCI-X I/O expansion slots.

The Integrity rx4640-8 server also has extensive availability and management features, which make it ideal for deployment in mission-critical data centers or compute-intensive server farms. Features such as hot-swap redundant components, memory chip spare, an integrated management processor, and high-availability clustering support make the Integrity rx4640-8 server ideal for nearly any computing environment.

Furthermore, the Integrity rx4640-8 server was designed for investment protection. It is the only Itanium 2-based server that can be “built” by a board-swap, in-chassis upgrade from an existing RISC server. Customers who have an rx4640 with single Itanium 2 processors installed will be able to upgrade to the mx2 dual-processor modules simply by swapping processor modules and installing new firmware. Those customers who own an rp4440 with dual-processor PA-8800 modules installed will be able upgrade to the mx2 dual-processor modules simply by swapping processor modules, installing new firmware, and changing the version of the operating system from HP-UX 11i v1 to HP-UX 11i v2. The upgrade path from an rp5400 series server or from the HP rx5670 to the Integrity rx4640-8 server with the mx2 dual-processor modules is a box swap.

The Integrity rx4640-8 server is flexible, too. It offers a choice of 64-bit operating systems, including HP-UX 11i v2, Linux (not supported with mx2 dual-processor module), or Microsoft Windows Server 2003. And it can be installed in a rack or in a standalone, pedestal configuration along with a host of choices from the full range of HP storage peripherals and I/O adapters.

Figure 5. The HP Integrity rx4640-8 server is suitable for rack-mount or standalone duty



HP Integrity rx4640-8 server details

HP Integrity rx4640-8 server product specifications

- Central processor
 - 1, 2, 3, or 4 Intel Itanium 2 processors at 1.3 GHz or 1.5 GHz
 - 2, 4, 6, or 8 Intel Itanium 2 processors at 1.1 GHz
 - (Note: The Integrity rx4640-8 server supports 1, 2, 3, or 4 HP mx2 dual-processor modules. Each module consists of two Intel Itanium 2 processors.)
- Cache: Intel Itanium 2 single processor (all on-chip)
 - 16 KB instruction and 16 KB data level 1 cache
 - 256 KB level 2 cache
 - 3 MB level 3 cache (1.3 GHz)
 - 6 MB level 3 cache (1.5 GHz)
- Cache: mx2 dual-processor module
 - Internal (on-chip)
 - 16 KB instruction and 16 KB data level 1 cache
 - 256 KB level 2 cache
 - 3 MB level 3 cache
 - External (on mx2 dual-processor module)
 - 32 MB level 4 cache
- Main memory
 - 1 GB minimum to 64 GB maximum PC2100 parity-protected ECC chip spare DDR CL2 memory
 - Choice of either 16 DIMM or 32 DIMM memory carrier board
 - 12.8 GB/s memory bandwidth
- Chipset
 - HP zx1 Chipset
 - 105-nanosecond memory latency
 - 6.4 GB/s system bus bandwidth
 - 4.0 GB/s aggregate I/O bandwidth
- Expansion slots
 - 2 PCI-X on independent buses, 64-bit 133 MHz
 - 4 PCI-X on 2 shared buses, 64-bit 66 MHz
- Hot-plug disk drives (2 bays)
 - 292 GB maximum internal storage
 - Integrated dual-channel Ultra160 SCSI controllers
 - Optional high-availability (duplex) configuration for internal disk drives
 - Disk sizes available: 36 GB 15,000 rpm, 73 GB 15,000 rpm, 146 GB 10,000 rpm
- Removable media
 - Optional slimline DVD-ROM or DVD with CD-write capability
- Core I/O interconnect ports
 - Gigabit-TX LAN with RJ-45 connector (10/100/1000BT auto-sensing)
 - Ultra160 SCSI port for external peripherals

- Management processor interconnect:
 - 10/100BT management LAN with Web console access
 - RS-232 local console
 - RS-232 remote/modem console
 - RS-232 general purpose
- 2 USB Series A 2.0 (480 Mb/s) ports (optional)
- VGA (optional)
- Power and cooling
 - 1 1200 W hot-swap power supply standard
 - Optional second 1200 W hot-swap power supply for N+1 redundancy
 - 6 cooling fans with N+1 redundancy
- Power requirements
 - Input current: 8 A at 200–240 V
 - Line frequency: 50 Hz to 60 Hz
 - Maximum power input: 1368 W


Physical and environmental specifications

- Environmental specifications
 - Altitude:
 - Operating: 3048 m (10,000 ft.) maximum
 - Non-operating: 4572 m (15,000 ft.) maximum
 - Temperature:
 - Operating: +05° C to +35° C (+41° F to +95° F)
 - Non-operating: –40° C to +70° C (–40° F to +158° F)
 - Humidity:
 - Operating: 15% to 80% (relative, non-condensing)
- Physical dimensions in rack orientation
 - Height: 17.3 cm (6.8 in.), 4U EIA
 - Width: 48.2 cm (19 in.)
 - Depth: 69.0 cm (27.2 in.), including 2.9 cm (1.1 in.) front bezel
- Physical dimensions in standalone configuration
 - Height: 26.1 cm (10.28 in.)
 - Width: 53.2 cm (20.95 in.)
 - Depth: 69.5 cm (27.36 in.)
- Net weight
 - Maximum configuration: 45.4 kg (100 lb.)

Mechanical design and packaging of the HP Integrity rx4640-8 server

The exploded view illustrates the location of major components as well as the mechanical and architectural features of the Integrity rx4640-8 server. The server is partitioned into two main electrical partitions—the system partition, including baseboard, CPU board, and memory carrier boards; and the I/O partition, consisting of PCI-X I/O slots, core I/O, and the management processor.

Figure 6. Major components of the HP Integrity rx4640-8 server

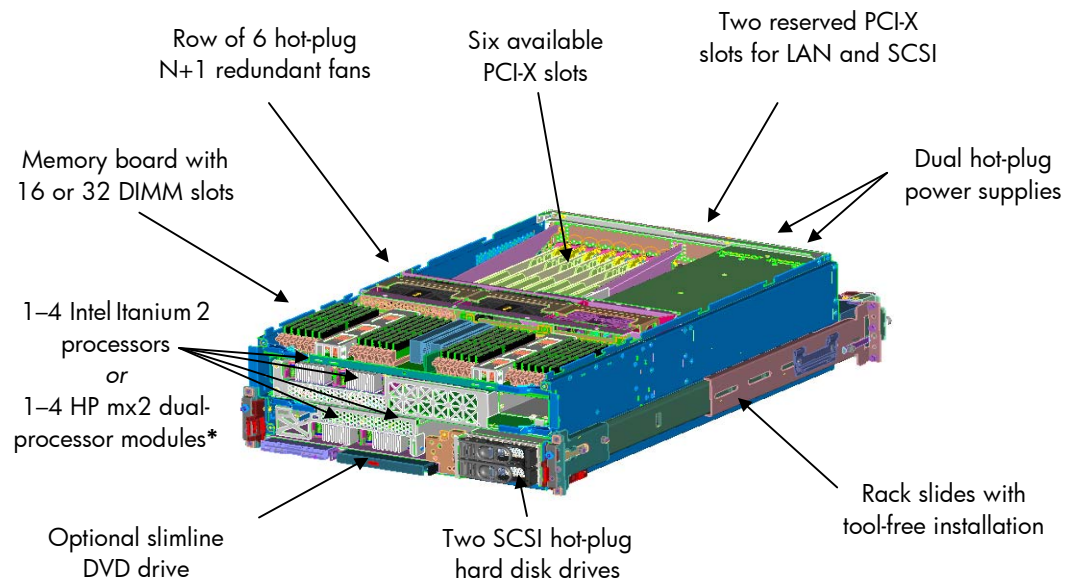

* Note: Single Intel Itanium 2 processors and HP mx2 dual-processor modules cannot be mixed in the same system.

Removing the front bezel and a sheet-metal section that covers the top one-third and front of the server provides access to the memory and processor boards. Memory can be easily added to the server (when powered off) without removing the memory carrier. Depending on your choice of memory carriers, 16 or 32 DIMMs can be loaded into the server. Both the memory carrier and processor boards can be easily removed without tools by unlatching them and sliding them forward.

A media bay located at the lower front of the server accepts an optional slimline DVD drive. Located to the right of the media bay are the power switch and LED indicators for system status. A pair of hot-plug, low-profile disk drives are located in the lower right front corner of the server.

Three pairs of redundant, hot-swap fans span the width of the server behind the processor board, memory board, and other assemblies located in the front half of the server.

Behind the bank of fans are two hot-swap power supply bays at the right rear of the server. Each power supply has a pull-through fan where air exits at the rear. To the left of the power supplies and behind the bank of fans are eight PCI-X slots. Factory-installed SCSI controller and Ethernet LAN cards occupy two of these slots. The remaining six PCI-X slots have hot-plug capability and can be loaded with I/O cards selected by the end user.

Racking density

The Integrity rx4640-8 server offers unparalleled performance density. At four EIA units per server, up to ten servers can be installed into a single 2-meter rack cabinet.

The Integrity rx4640-8 server is supported in HP Rack System/E, 10000 series, 9000 series, and 7000 series rack cabinets. The server is also supported in a variety of third-party, non-HP racks and cabinets. Refer to the *HP Server Configuration Guide* for the latest list of qualified third-party racks.

Note: Dimensions for rack configuration are as follows: height = 6.8 inches (17.3 cm), depth = 27.2 inches (69.0 cm), width = 19 inches (48.2 cm).

High-availability slider rails

The Integrity rx4640-8 server comes standard with a pair of side-mounted high-availability (HA) slider rails, which use no additional vertical space and can be installed without tools. With the HA slider rails, the unit can be completely serviced without removing it from the rack, thus allowing side-by-side racks of systems to be completely supported without sacrificing floor space for side access to the system.

Cabinet spacing requirements

The Integrity rx4640-8 server requires a minimum of 24 inches (61 cm) of free space in both the front and rear of the cabinet for proper ventilation. During product installation and servicing, a total of 30 inches (76 cm) of free space is needed at the front of the cabinet.

Standalone (rackless) configuration

When a cabinet is not desired, the Integrity rx4640-8 server is also available in a standalone (rackless) configuration. The standalone system is ideal for a back room or on a shelf; however, the standalone server should not be placed in an office environment due to acoustic and RFI characteristics. The standalone configuration utilizes the same internal chassis and front plastic bezel as the racked version. A tubular steel frame attaches to the sides and wraps around the bottom of the server. The Integrity rx4640-8 server can be positioned either on its bottom or side when the tubular frame is attached. The frame also makes it easy for two people to pick up and move the server. Up to three Integrity rx4640-8 servers can be stacked in a horizontal position, as in a rack, with plastic brackets that snap onto the steel tubes.

Note: Dimensions for standalone configuration are as follows: height = 10.28 inches (26.1 cm), depth = 27.36 inches (69.5 cm), width = 20.95 inches (53.2 cm).

Itanium 2–based and HP mx2-based Integrity servers

This section discusses the electrical architecture of the HP Integrity rx1600-2, rx2600-2, and rx4640-8 servers. Topics covered include the HP zx1 Chipset, block diagrams, and I/O layout.

Overview of the HP Scalable Processor Chipset zx1

HP develops chipsets to meet the needs of enterprise and technical customers. In a world where every company has access to the same 64-bit processors, HP's strength is developing and tuning systems to deliver the kind of performance and reliability that IT, engineering, and research professionals demand.


The HP zx1 Chipset is the central building block of the HP Integrity rx1600-2, rx2600-2, and rx4640-8 servers. The HP zx1 Chipset is a modular, three-chip solution designed for cost-effective, high-bandwidth, low-latency 1- to 4-way symmetrical multiprocessing (SMP) servers and workstations.

Invented entirely by HP, the HP zx1 Chipset is an exclusive value-add in the standards-based world of Itanium 2–based platform computing.

The HP zx1 Chipset consists of three modular components:

- The HP zx1 Chipset memory and I/O controller connects to the processor bus and contains dual memory controllers and the I/O cache controller. It interfaces with the Intel Itanium 2 processor bus and provides a low-latency connection to DDR memory, either directly or through zx1 Chipset scalable memory expanders. The controller can connect up to 12 zx1 Chipset memory expanders for quadruple the base memory capacity. It can also connect up to eight zx1 Chipset I/O adapters, capable of sustaining 4.0 GB/s of I/O bandwidth.
- The HP zx1 Chipset I/O adapter chip is a scalable solution designed to support PCI-X, PCI, and AGP bus architectures. It provides a scalable I/O implementation for a wide variety of systems. The Integrity rx1600-2, rx2600-2, and rx4640-8 servers do not deploy AGP graphics bus technology. AGP is available in the HP zx2000 and zx6000 Workstations, which also employ the HP zx1 Chipset.
- The HP zx1 Chipset scalable memory expander is an optional component used to increase memory capacity and memory bandwidth. Acting as a memory hub, it decreases the number of signal loads on the memory bus, thereby allowing the system to increase its memory transfer rate. Memory expanders are not used in the Integrity rx1600-2 or rx2600-2 servers. The Integrity rx4640-8 server, however, deploys 6 memory expanders, resulting in large memory capacity (up to 64 GB over 32 DIMM slots) and bandwidth (12.8 GB/s).

Figure 7. The three components of the HP zx1 Chipset

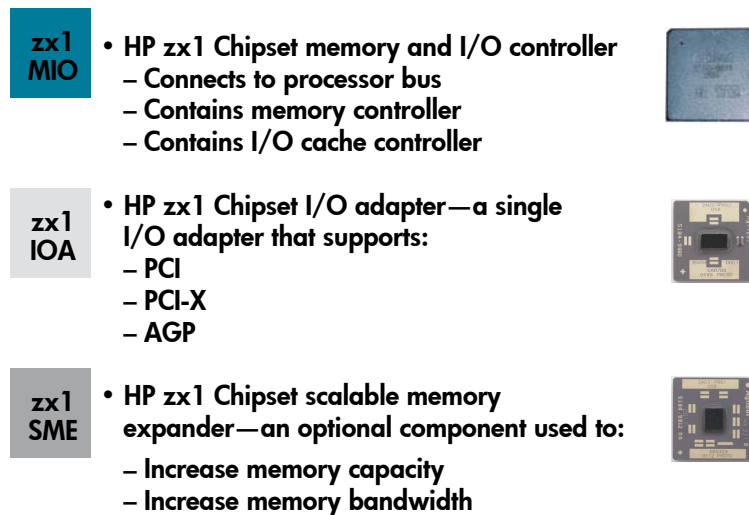

The HP zx1 Chipset was designed with several goals in mind:

- **Provide the best performance**—For demanding applications that don't fit within the processor cache, the memory system design is the key to performance. The HP zx1 Chipset's memory bandwidth has been enhanced with dual memory controllers to provide from 8.5 to 12.6 GB/s of memory bandwidth with 80 to 105 nanoseconds of open page latency.
- **Provide the right functionality**—Use systems that include both memory capability and PCI-X support.
 - At 16 GB, 24 GB, and 64 GB, respectively, the Integrity rx1600-2, rx2600-2, and rx4640-8 servers provide enough memory capacity for the most demanding tasks.

- The Integrity rx1600-2, rx2600-2, and rx4640-8 servers support 133 MHz PCI-X buses capable of handling the latest generation of high-speed I/O adapters.
- **Enable a family of systems via a modular, multi-chip design**—Designers can choose the chipset components they need and select the number of these components to meet system cost and design requirements. For example, the more-expandable Integrity rx4640-8 server deploys HP zx1 Chipset scalable memory expanders for greater memory capacity. The Integrity rx1600-2 and rx2600-2 servers, on the other hand, do not deploy zx1 Chipset scalable memory expanders, resulting in lower system costs.

The HP zx1 Chipset is ideal for use with the Intel Itanium 2 processor because it complements the processor's price/performance advantages. Moreover, the new zx1 Chipset leverages HP's co-developer knowledge of the CPU itself. Indeed, the HP zx1 Chipset was the turn-on vehicle for the Intel Itanium 2 processor in February 2001. At that time, Itanium 2-based systems with the HP zx1 Chipset were already running HP-UX 11i v2, Linux, and Microsoft Windows.


Table 2. Features and benefits of the HP zx1 Chipset

Feature	User benefit
High memory bandwidth, low memory latency	Top application performance, faster time to solution
High memory capacity	Excellent performance for large models/databases
133 MHz PCI-X	Highest-performance I/O adapters
Modularity	Family of Intel Itanium processor-based servers and workstations, each customized for the right level of cost and scalability

Architectural overview of the HP Integrity rx1600-2 server

The HP Integrity rx1600-2 server supports either one or two Low Voltage Intel Itanium 2 processors linked to the HP zx1 Chipset memory and I/O controller through a 200 MHz, double-pumped 128-bit front-side system bus. Total bandwidth on the system bus is 6.4 GB/s.

Figure 8. The HP Integrity rx1600-2 server architecture features Intel Itanium 2 processors and the HP zx1 Chipset

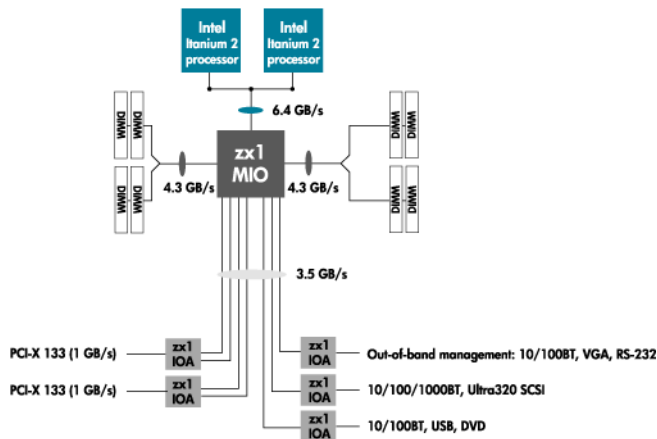


Memory DIMMs are attached directly to two 266 MHz, 4.25 GB/s memory buses. Combined memory bandwidth across both buses is 8.5 GB/s. Each bus links up to six double data rate (DDR) DRAM memory DIMMs. Total system memory capacity is 16 GB, via twelve 8 GB DIMMs.

The I/O architecture consists of seven 0.5 GB/s channels allocated among five zx1 Chipset I/O adapters. Each of these seven adapters provides a PCI-X or PCI bus to the available I/O slots and core I/O devices. The first four channels connect to two 133 MHz PCI-X I/O slots, providing 1 GB/s of sustained throughput per slot. These slots are ideal for high-bandwidth I/O adapters such as high-performance clustering interconnect. The remaining three I/O channels link to three PCI buses, which in turn link to the core LAN, SCSI, IDE, and USB interfaces and to the management processor.

Architectural overview of the HP Integrity rx2600-2 server

The HP Integrity rx2600-2 server supports either one or two Intel Itanium 2 processors linked to the HP zx1 Chipset memory and I/O controller through a 200 MHz, double-pumped 128-bit front-side system bus. Total bandwidth on the system bus is 6.4 GB/s.

Figure 9. The HP Integrity rx2600-2 server architecture features Intel Itanium 2 processors and the HP zx1 Chipset

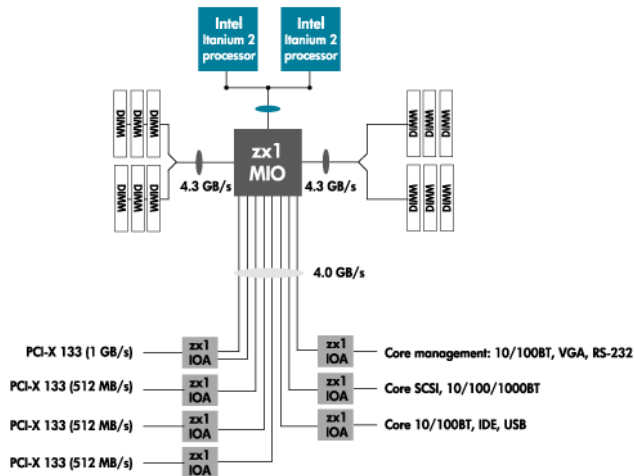


Memory DIMMs are attached directly to two 266 MHz, 4.25 GB/s memory buses. Combined memory bandwidth across both buses is 8.5 GB/s. Each bus links up to six DDR DRAM memory DIMMs. Total system memory capacity is 24 GB, via 12 2 GB DIMMs.

The I/O architecture consists of eight 0.5 GB/s channels allocated among seven zx1 Chipset I/O adapters. Each of these seven adapters provides a PCI-X or PCI bus to the available I/O slots and core I/O devices. The first two channels connect to a single 133 MHz PCI-X I/O slot, providing 1 GB/s of sustained throughput. This slot is ideal for high-bandwidth I/O adapters such as high-performance clustering interconnect. The next three I/O channels link to three independent 133 MHz PCI-X I/O slots, each with 0.5 GB/s of sustained throughput. The remaining three I/O channels link to three PCI buses, which in turn link to the core LAN, SCSI, IDE, and USB interfaces and to the management processor.

Architectural overview of the HP Integrity rx4640-8 server

The HP Integrity rx4640-8 server supports either one, two, three, or four single Intel Itanium 2 processors or one, two, three, or four HP mx2 dual-processor modules (each mx2 dual-processor module has two Intel Itanium 2 processors) linked to the zx1 Chipset memory and I/O controller through a 200 MHz, double-pumped 128-bit system bus. Total bandwidth on the system bus is 6.4 GB/s.

Figure 10. The HP Integrity rx4640-8 server supports up to four single Intel Itanium 2 processors or four mx2 dual-processor modules linked to the HP zx1 Chipset

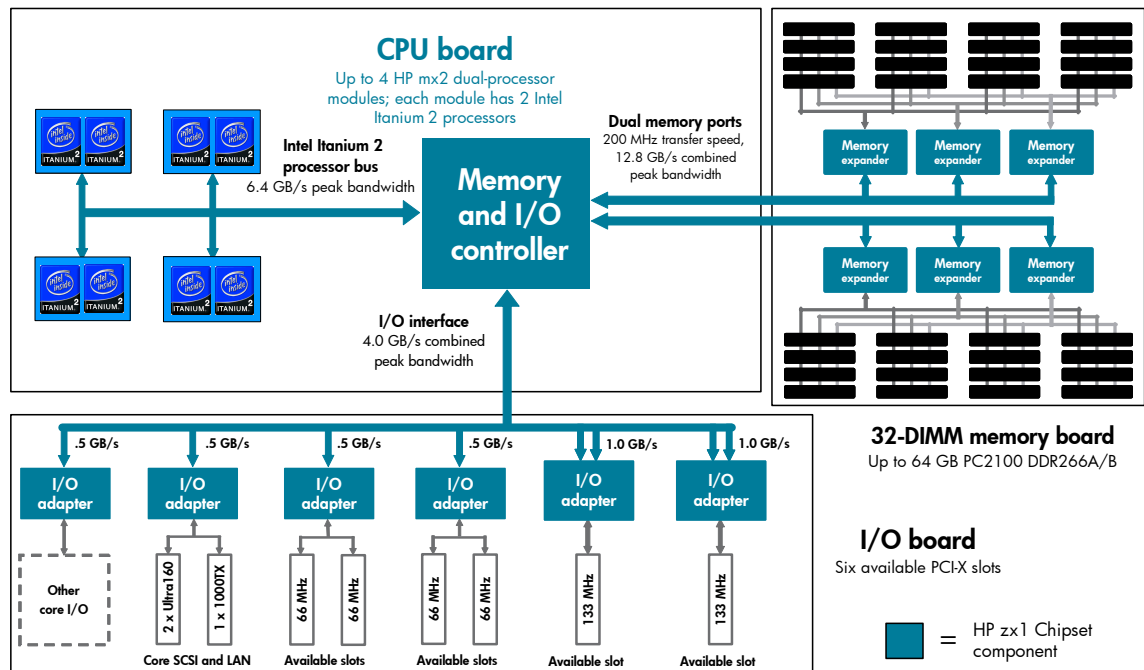

The zx1 Chipset memory controller links to two independent 200 MHz, 6.4 GB/s memory buses. Each bus connects to three zx1 Chipset scalable memory expanders, which in turn allocate bandwidth to the DDR DRAM memory DIMMs. Total DIMM capacity is either 16 or 32 units on a single memory carrier board.

The I/O architecture consists of eight 0.5 GB/s channels allocated among six zx1 Chipset I/O adapters. Each of these six adapters provides a PCI-X or PCI bus to the available I/O slots and core I/O devices. The first two I/O channels connect to an independent 133 MHz PCI-X I/O slot with 1.0 GB/s of sustained throughput. The next two I/O channels connect to an identical 133 MHz PCI-X slot. Two more I/O channels connect to a pair of zx1 Chipset I/O adapters, each of which in turn connects to a pair of 66 MHz PCI-X I/O slots. Each slot-pair shares 0.5 GB/s of bandwidth.

The final two I/O channels connect to the core I/O. One channel provides 0.5 GB/s of bandwidth to the core 10/100/1000BT LAN as well as to the dual-channel Ultra160 SCSI controller. The other channel provides 0.5 GB/s of bandwidth to the core management LAN, RS-232 serial ports, USB ports, and VGA.

Extensible firmware interface

The extensible firmware interface (EFI) is an interface between the HP-UX 11i v2, Linux, and Windows operating systems and the Itanium 2–based platform firmware. The file system supported by the extensible firmware interface is based on the file allocation table (FAT) file system. EFI allows the use of FAT-32 for the system partition. (The system partition is required on a bootable disk for the Itanium 2–based platform.)

For a hard disk, the system partition is a contiguous grouping of sectors on the disk. The starting sector and size are defined by the EFI partition table residing on the second logical block of the hard disk and/or by the master boot record (MBR), which resides on the first sector of the hard disk. The system partition can contain directories, data files, and EFI images. The EFI system firmware may search the \EFI directory of the EFI system partition, EFI volume, to find possible EFI images that can be loaded. (The HP-UX 11i v2 boot loader is one example of an EFI image.)

Baseboard management controller

The baseboard management controller provides ease of system management. The baseboard management controller supports the industry-standard Intelligent Platform Management Interface (IPMI) specification. This specification describes the management features that have been built into the system. These features include diagnostics, configuration management, hardware management, and troubleshooting. The baseboard management controller interacts with the management processor to provide the highest level of system manageability and high-availability monitoring.

The baseboard management controller provides the following:

- 40 MHz ARM7TDMI RISC core, 1 MB flash ROM, 512 KB battery-backed RAM
- Power and reset management
- System “health” management: fans, power supplies, temperatures, voltages
- Event logging and reporting: system event log, forward progress log, diagnostic LEDs on status panel
- Device inventory
- Hardware and data protection: automatic clean OS shutdown on critical events, secure storage of system configuration parameters, protection of system flash ROM
- Link to dedicated out-of-band management processor (MP) via Intelligent Platform Management Bus (IPMB); enables remote management through the MP LAN or MP serial ports
- Compliance with Intelligent Platform Management Interface 1.0

HP management processor


The management processor (MP) is included as a standard part of the HP Integrity rx2600-2 and rx4640-8 servers and is an optional feature of the HP Integrity rx1600-2 server. This processor provides a remote interface into the baseboard management controller to manage system resources, diagnose the health of the system, and facilitate system repair. Administrators can interact with the management processor on a dedicated, out-of-band (that is, independent of the main system data paths) communication link that can be accessed via RS-232 serial ports or a 10/100BT management LAN.

The management processor reduces or eliminates the need for the system administrator to be physically at the system to perform tasks such as diagnostics, system management, or even hard resets. The management processor has its own battery backup, so it can be accessed even in the unlikely event that the main system power is out and the operating system has stopped functioning.

Here are some of the features enabled by the management processor:

- System management over the Internet or intranet (Web console)
- System console redirection
- Console mirroring
- System configuration for automatic restart
- Viewing history log of system events
- Viewing history log of console activity
- Setting MP inactivity timeout thresholds
- Remote system control
- Remote power cycle (except for MP housekeeping power)
- Viewing system status
- Event notification to system console, e-mail, pager, and/or HP Response Centers; e-mail and pager notification work in conjunction with HP's Event Monitoring Service (EMS)
- Automatic hardware protection of critical environmental problems
- Access to management interface and consoles on WAN failure (modem required)
- Automatic system restart
- Forward progress indicator (via a virtual front panel)
- Out-of-band manageability and system firmware update
- Configuration of manageability and console security
- Secure Sockets Layer (SSL) encryption on Web console access

Figure 11. High-level depiction of the HP Integrity rx1600-2, rx2600-2, and rx4640-8 server management processor architecture

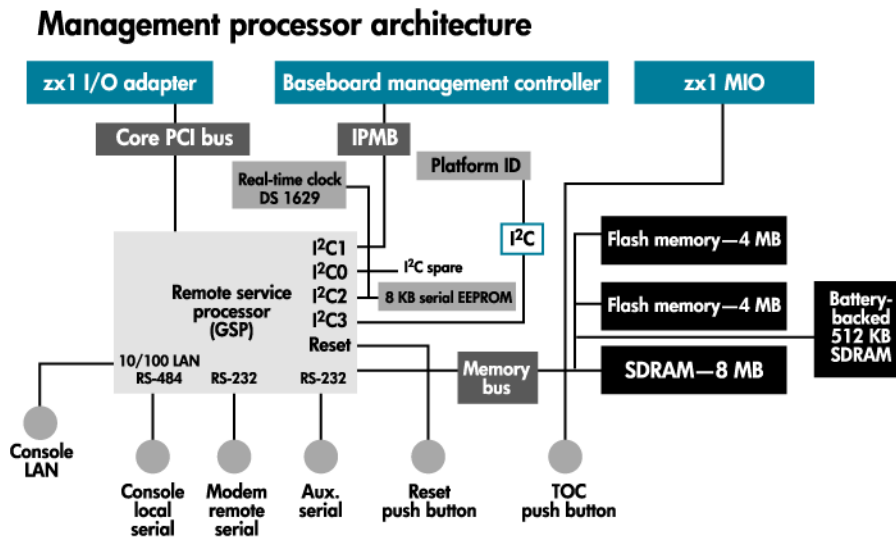

Built for high availability

The HP Integrity rx4640-8 and rx2600-2 servers have been designed to be an integral part of a mission-critical environment, delivering from 99.95% availability to close to 99.999% availability, depending on the specific solution configuration. Delivering these levels of uptime requires a strong base of single-system high availability (SSHA) in the hardware. The Integrity rx4640-8 and rx2600-2 servers have redundancy and resiliency built in from the ground up, starting with the chassis infrastructure, through the I/O, and continuing through the memory and processor subsystems.

The servers' strong SSHA is further bolstered by HP's fault Event Monitoring Service (EMS). And for the highest uptime, any of the three servers can be configured as an integral part of a high-availability cluster, using clustering software such as HP Serviceguard.

High-availability chassis infrastructure (power and cooling)

Fans in the Integrity rx4640-8, rx2600-2, and rx1600-2 servers provide excellent cooling, pulling cool air from the front of the unit, flowing the air back over internal system components, and then discharging heated air out the back of the server. All the fans in the Integrity rx4640-8 and rx2600-2 servers are easily accessible and provide N+1 redundancy.

These servers have high-availability power supplies, too. The Integrity rx4640-8 and rx2600-2 servers' power subsystems provide high availability with N+1 redundant power options. The Integrity rx4640-8 server comes standard with two hot-swap power supplies, and an optional third supply can be ordered for 2+1 redundancy. The Integrity rx4640-8 and rx2600-2 servers each come standard with a single hot-swap power supply; an optional second power supply gives these servers 1+1 redundancy of power supplies. To further enhance availability, each power supply has its own dedicated power feed or line cord. Cords can be plugged into separate power grids for the maximum level of power protection.

Hot-plug disk drives

The Integrity rx4640-8 server supports up to two SCSI disk drives, the Integrity rx2600-2 server supports up to three, and the Integrity rx1600-2 server supports up to two. All disks are accessible from the front of the system and can be removed (or hot-plugged) while the server continues to run.

A dual-channel SCSI controller manages the pair of disks in the Integrity rx4640-8 server. The disks can be configured either on a single SCSI channel or one disk on each of the two channels with disk mirroring for added availability. When only one SCSI channel is used for the disks, the second can be connected to an external device such as a tape drive.

A single dual-channel SCSI controller manages the three disks in the Integrity rx2600-2 server. One channel links to two internal disks; the second channel is connected to the third internal disk. This allows disk mirroring across separate SCSI channels, further enhancing availability.

A single dual-channel SCSI controller manages the two disks in the Integrity rx1600-2 server. One channel links to two internal disks, and another channel links to an external connector.

Multiple I/O channels

The multiple zx1 Chipset I/O channels in the Integrity rx4640-8, rx2600-2, and rx1600-2 servers provide failover, load balancing, and failure isolation. In these servers, failures on one channel do not disrupt activities on other channels. Furthermore, the servers deploy fully independent PCI-X buses to isolate traffic on I/O adapters. If a problem occurs on one adapter, it will not interfere with traffic on another bus.

ECC and chip spare memory

The memory systems for the Integrity rx4640-8, rx2600-2, and rx1600-2 servers utilize error-correcting code to correct single-bit errors, and they use HP's chip spare technology to protect against multi-bit errors.

Chip spare enables an entire SDRAM chip on a DIMM to be bypassed in the event that a multi-bit error is detected on that SDRAM. In order to use the chip spare functionality, identical-sized DIMMs must be loaded in quads. Different DIMM sizes are supported, as long as they are in different quads. For example, a quad of 512 MB DIMMs can be loaded along with a second quad of 1 GB DIMMs, and chip spare will be enabled on all the DIMMs.

Because of the chip spare feature, the Integrity rx4640-8, rx2600-2, and rx1600-2 servers are completely resilient to all SDRAM failures, regardless of the number of bits involved in the fault condition. This virtually eliminates memory failures as a source of system errors.

Some other vendors deal with multi-bit SDRAM failures by accepting the fact that they will occur. That is, they use a scheme that supports only failure detection, not failure correction. HP believes that this is unacceptable and a dangerous choice for servers in business-critical environments. In fact, server systems that employ failure detection but not correction are at high risk to fail due to memory problems.

CPU error correction and dynamic processor resiliency

In the Integrity rx1600-2, rx2600-2, and rx4640-8 servers, the L1 and L2 cache both have full single-bit error checking and correcting as well as double-bit error detection. Additionally, all the instruction and data paths also have single-bit error-checking and -correcting capabilities. What's more, the system processor bus has parity detection, and the data path is covered by error correction.

The Integrity rx1600-2, rx2600-2, and rx4640-8 servers employ dynamic processor resiliency (DPR), too. With DPR, any CPU generating correctable cache errors at a rate deemed unacceptable is

de-allocated from use by the system. This feature helps protect against a CPU degrading to the point where it may cause system crashes.

DPR works like this: When excessive errors are reported against a CPU, the CPU is deactivated (that is, the operating system will not schedule any new processes on it). The system firmware remembers the CPU's serial number and the time when this action was taken. From then on, at each poll interval the system monitor checks (by comparing the serial numbers) to see if the CPU has been replaced or not. If the processor has been replaced, its history is reset.

If the system is rebooted before the offending CPU has been replaced, the monitor generates a warning message and immediately de-allocates the CPU. (Such CPU de-allocation is only supported in the HP-UX 11i v2 operating system. It is not supported in Windows or Linux.)

Comprehensive error logs

All system events are stored in the system event log (SEL) in nonvolatile memory. In addition, system firmware creates activity and forward progress logs (FPLs) in nonvolatile memory. In all but the most extreme situations—that is, in more than 95 percent of cases—this information will be sufficient to diagnose system failures to a single replaceable part. The SEL and FPL are available to both the management processor (and therefore are available remotely) and to system-level tools, leading to quick and accurate diagnosis.

Fault management throughout the lifecycle

Fault management is HP's overall strategy and program to provide a complete value chain for detection, notification, and repair of system problems. Fault management starts right during the design phase, when hardware and OS designers include capabilities and instrumentation points that provide the ability to detect and isolate system anomalies. Monitors are created to poll for system health information or to asynchronously respond to instrumentation points that have been designed into the system to report problems or faults.

Fault management also involves implementing several methods for maintaining historical event information, allowing preservation of information for analysis or trending. Faults that generate errors and warnings are automatically logged to syslog, while notes and audit information are copied to an event log. Other options are available for preserving historical information as well.

Fault management provides immediate alerts of problems—and even potential problems—as soon as they are detected so that customers can take corrective action. In some cases fault monitors are actually smart enough to repair faults or prevent them from occurring.

Capabilities of fault monitors

Fault management, coupled with the monitoring capabilities, keeps tabs on the health of system components and generates close to real-time events when problems develop. These events can trigger corrective action to enable the system to continue functioning, or they can trigger alerts to system administration personnel to appropriately handle the situation before it becomes more severe.

Fault monitors are able to:

- Poll the system for health information
- Handle asynchronous events that have been designed into the hardware or software
- Perform corrective action when possible
- De-allocate failing memory before it fails (dynamic memory resiliency)
- De-allocate failing processors before they fail (dynamic processor resiliency)
- De-configure failed processors from the working set before the next reboot
- Shut down the system when power failure causes a switch to UPS

- Manage events so that system performance is not hindered in the face of errors
- Provide information on problem causes and what actions to take

Notification and integrated enterprise management

Fault management currently uses the HP EMS (Event Monitoring Service) infrastructure for its notification methodology. EMS enables a wide variety of notification methods, including pager, e-mail, SNMP traps, system console, system log, text log file TCP/UDP, and HP OpenView Operations Center (OPC) messaging. Fault management events can be viewed directly on the server or through HP Insight Manager, which can aggregate information from multiple systems in the data center.

Customers also have the option to integrate fault management events with enterprise management software from HP (OpenView) or from BMC, Tivoli, Computer Associates, or MicroMuse.

Added options with HP support

For customers who purchase HP support, fault management events can be forwarded to the HP support organization. In this case, HP can take responsibility for monitoring, filtering, and trending the events and taking action on items that need attention.

At the premium end of HP's support offerings, customers can also sign up to receive services from HP Instant Support Enterprise Edition (ISEE), which is HP's single, common remote support solution across multivendor environments. ISEE provides features to manage diverse environments, spanning from simple to complex, including mission-critical IT data centers. ISEE uses continuous hardware event monitoring and automated notification to identify and prevent potential critical problems. Through ISEE's remote diagnostic scripts and vital information collected about the status and configuration of your environment, ISEE enables fast restoration of supported systems, storage, and network devices.

For mission-critical support customers, ISEE provides proactive capabilities to assess and help optimize your environment:

- Benchmarking and trending analysis of the availability of your HP-UX systems
- Fast recognition of unreachable systems to enable support processes to be quickly activated to determine the cause of outage
- ISEE activity summary of incidents, remote access sessions, and unreachable device notification incidents
- Systematically analyzing your HP-UX configurations for software patch irregularities (missing patches, superseded patches, etc.), providing a consolidated view of the patch status in your environment and simplifying patch maintenance activities to save you time

ISEE helps to minimize the risk of unplanned system downtime and impact to business productivity with continuous remote monitoring and fault detection.

Proactive, not reactive

Fault management uses the philosophy of proactive (as opposed to reactive) management of problems. Fault management provides highly accurate fault diagnosis the first time, even as the problem occurs, and initiates or allows fast corrective action. Fault management results in a substantial decrease in unplanned downtime.

An easy transition for RISC and IA-32 users

A major feature of the Intel Itanium 2 processor and HP's new servers is backward compatibility of the Intel Itanium 2 processor with IA-32 and PA-RISC processors. Backward compatibility is particularly useful for applications that are not performance-intensive or for system utilities and development tools

that aid in porting and migration. Although most existing IA-32 and PA-RISC binaries are compatible, optimal performance can only be achieved once an application is compiled specifically for the Intel Itanium 2 processor.

Running 32-bit Windows applications

32-bit Microsoft Windows binaries can run on the 64-bit Windows operating system using the Intel Value Engine (IVE) hardware and Windows on Windows 64 (WOW64) software emulation, which is already part of 64-bit Microsoft Windows. The OS automatically detects whether the application is 32-bit or 64-bit and handles it accordingly.

Additionally, Microsoft and Intel have now made available the IA-32 Execution Layer (IA-32 EL) software. The IA-32 EL is a software binary that is available for download from Microsoft; it will be integrated into Windows Server 2003 Service Pack 1. Whenever a 32-bit application is launched, the operating system will call the IA-32 EL to translate the 32-bit application into a native Itanium 2–based application. 32-bit EL will continue to provide compatibility and will deliver further performance improvements on faster Intel Itanium processors released in the future.

Running 32-bit Linux applications

32-bit Linux binaries can be run on Itanium 2–based systems using the processor’s built-in hardware translation feature. The Intel Value Engine hardware is part of the Intel Itanium 2 processor, and it gives a basic IA-32 functionality. If an application is performance-critical, recompiling the application will allow it to take advantage of the strengths of the Intel Itanium 2 microarchitecture.

Running RISC applications

Users can run their PA-RISC binaries unchanged and completely transparently, thanks to the HP Aries dynamic code translator that is part of HP-UX 11i v2. This translator facilitates running 32-bit and 64-bit PA-RISC applications on the Intel Itanium 2 microarchitecture without the need to recompile, which can prolong the longevity of legacy applications from HP 9000 servers to HP Integrity servers. A straightforward recompile of 32-bit and 64-bit PA-RISC applications yields native Intel Itanium 2 processor binaries. In addition, the HP-UX 11i v2 operating system has built-in source and data compatibilities. HP-UX 11i Linux binary and source compatibility enables the running of Linux applications. Finally, HP’s transition assistance program provides peace of mind in upgrading to industry-leading technology.

Porting and migration services: transition help from HP

Thousands of programs run quite well in Intel Itanium processor compatibility mode with few changes. However, porting these applications to the Intel Itanium 2 processor allows them to run even better because they can then take full advantage of the new processor’s distinctive capabilities.

To help customers make the transition to the Intel Itanium Processor Family and get the most from this exciting new technology, HP offers a flexible set of services. Customers can select from the following:

- Porting and Migration Workshop
- Porting and Migration Guidance
- Porting and Migration Detailed Assessment
- Porting and Migration Solution Delivery
- Online Services

See www.hp.com/products1/itanium/services/porting_migration.html for all the details on these services.

HP Services for the HP Integrity servers

Evolve your infrastructure confidently with a partner that stands accountable

When you're ready to take advantage of the performance improvements Itanium-based solutions offer, HP has a full range of multi-OS services to help make the transition as seamless and painless as possible. We'll help you quickly and confidently introduce HP Integrity servers into your existing IT environment and maximize their potential for your business. We offer assessment services to precisely define porting requirements and chart a course to deployment, implementation services to install and configure equipment rapidly, and education services to provide your staff with the expertise required to achieve optimal system performance. Throughout the evolution process, HP accepts full accountability for delivering on the service commitments that we and our partners have made. And, our commitment to your satisfaction doesn't stop with the transition process itself. Our multi-OS support offerings—from simple reactive to comprehensive mission critical—reduce the risks associated with downtime once your HP Integrity servers are installed. We are looking ahead to help with your long-term success by working with leading independent software vendors (ISVs) in both the technical and commercial markets to tailor their applications to the Intel Itanium 2 architecture, thereby exploiting the full potential of your HP Integrity servers.

HP Services delivers end-to-end solutions that offer consistent quality and service levels across multiple platforms such as UNIX, Windows, and Linux, as well as systems from other well-known vendors. With the introduction of the Itanium 2–based midrange servers, HP is the only vendor that offers the services to support the implementation of multiple operating systems (UNIX, Windows, and Linux) on a single Itanium processor–based server. HP Services will utilize its wide range of offerings and its experienced services personnel to help companies fully exploit the Itanium architecture's capabilities, while protecting their existing infrastructures.

HP StorageWorks and HP servers

The cornerstone of an Adaptive Enterprise

At the heart of an Adaptive Enterprise is application processing and information storage. HP delivers storage and server portfolios that can accommodate the needs of any IT infrastructure through adaptive infrastructure solution offerings—from the most price-sensitive small or medium-sized business to the largest corporate enterprise.

Without question, HP has one of the broadest portfolios in the industry. As the worldwide leader in UNIX, Microsoft Windows, and Linux servers, the HP server portfolio encompasses ProLiant, Integrity, 9000 series, Alpha, and NonStop servers. As the worldwide leader in storage, the HP StorageWorks portfolio includes disk arrays, integrated management software, tape and optical devices, network attached storage (NAS), and storage area network (SAN) infrastructures. HP also consistently demonstrates the caliber of its HP StorageWorks and HP server lines—these products continually receive numerous best-in-class industry and customer awards.

Delivering more together

At the most basic level, HP delivers best-in-class products that are open for connectivity to any heterogeneous environment consisting of multivendor servers, operating systems, storage, applications, and other components. "Open" has always been the foundation of the HP strategy for doing business. Yet using HP StorageWorks solutions and HP servers together in the same environment can yield additional advantages for the Adaptive Enterprise. By deploying HP storage and HP servers along with HP services, customers gain more for their IT environment and overall business—more stability, efficiency, adaptability, and, ultimately, more RoI.

“There are so many advantages to having one powerful vendor like HP that can integrate all our solutions into a cohesive, flexible infrastructure . . . we looked at SAN solutions from Sun/Hitachi, EMC, IBM, and HP . . . only HP offered the total solution we needed.”

Nader Karimi,
Chief Information Officer,
Screen Actors Guild
Producers Pension and
Health Plans

More RoIT with HP StorageWorks and HP servers

HP delivers one of the broadest total product portfolios in the industry. HP StorageWorks and server product lines are second to none at providing best-in-class standalone functionality in any operating environment. HP StorageWorks hardware and software, HP servers, and HP Services together provide a more synergistic and powerful solution that enables an Adaptive Enterprise. Customers gain more control of their data center and overall business with more stability, efficiency, and adaptability, which all lead to increased RoIT.

Combined deployments can reduce a customer’s operating costs, with better price/performance, investment protection, virtualization, unified management capabilities, and total IT consolidation providing a better ROI and TCO.

IT availability is crucial in today’s business environment. If an infrastructure is slow or down, revenue will go to the competition. HP storage and servers together deliver maximum uptime with complete, seamless, and *total* integration. With HP solutions and services, customers can count on HP as a trusted partner with a single point of accountability. The result is faster time to problem resolution and overall increased IT availability.

HP is best suited to drive business adaptability. With solutions and technology from HP, customers can change and adapt quickly to market needs. HP servers and storage can be delivered onsite in complete integrated turnkey solutions that are ready to deploy. In addition, virtualization removes traditional boundaries, and HP UDC delivers “wire once” capability for the entire data center. The full portfolio of HP services and managed solutions enables customers to build and manage an adaptive enterprise. It is all possible with HP.

Conclusion

On the road to becoming truly pervasive, the Intel Itanium 2 processor is faster and more capable than its predecessor. Now, with the Integrity rx1600-2, rx2600-2, and rx4640-8 servers, HP offers powerful servers based on the Intel Itanium 2 processor and featuring the new HP zx1 Chipset. The Integrity rx1600 server utilizes one or two Low Voltage Intel Itanium 2 processors and up to 16 GB of memory, the Integrity rx2600-2 server utilizes one or two Intel Itanium 2 processors and up to 24 GB of memory, and the Integrity rx4640-8 server utilizes as many as four HP mx2 dual-processor modules (with two Intel Itanium 2 processors per module) and 64 GB of memory. These servers offer cutting-edge, 64-bit power along with excellent price/performance.

The new servers are tailored for complex, floating-point-intensive computations, providing faster time to solution for demanding applications. They are especially suited to SSL Web serving, and they offer significant performance advantages over both IA-32- and RISC-based systems for Windows and database applications. They’re also perfect for running SAP, Siebel, PeopleSoft, and SAS business application suites.

The Intel Itanium 2 processor’s ability to run IA-32 and RISC binaries without modification helps provide protection for previous software investments, and HP’s porting services can effect a complete transition that takes full advantage of the Intel Itanium architecture. Another advantage is that customers with these servers can run any of four industry-leading operating systems—HP-UX 11i v2, Linux, Windows, or OpenVMS Evaluation Release (until 4Q04, when a production-quality release is expected). This multi-OS capability overcomes the complexities and challenges associated with deploying and maintaining a heterogeneous operating environment.

Whether for technical computing or commercial IT, the HP Integrity rx1600-2, rx2600-2, and rx4640-8 servers offer superior power, scalability, and efficiency—with lower costs.

For more information

Looking for more information about the Intel Itanium Processor Family? Find out more about the architecture and how HP can help you make your transition by visiting:

www.hp.com/go/itanium

Or visit our Itanium-based servers and workstations site at:

www.hp.com/products1/itanium/servers_workstations/index.html

Or contact any of our worldwide sales offices or HP Channel Partners (in the U.S., call toll-free 1-800-637-7740).

HP product information and technical documentation is available online at:

www.hp.com/go/rx1600

www.hp.com/go/rx2600

www.hp.com/go/rx4640

© 2003, 2004 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Intel, Itanium, Itanium Processor Family, and Xeon are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries. Linux is a U.S. registered trademark of Linus Torvalds. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation. UNIX is a registered trademark of The Open Group.

Financing available through Hewlett-Packard Financial Services Company or one of its affiliates is subject to credit approval and execution of standard HP Financial Services documentation. Other restrictions may apply. HP Financial Services reserves the right to change or cancel this program at any time without notice.

5982-5031EN, 04/2004

